


ORDERING INFORMATION



RNS-2006-□

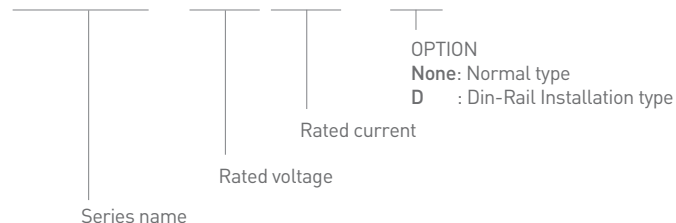


FEATURE

- High attenuation characteristics(150kHz~1MHz)
- Single Phase
- 1-Stage filter
- Low leakage
- Quick and easy push-down terminal block
- Safety cover
- DIN rail mountable(Option)

APPLICATION

- Industrial equipments
- Personal computer & peripherals
- Digital equipments


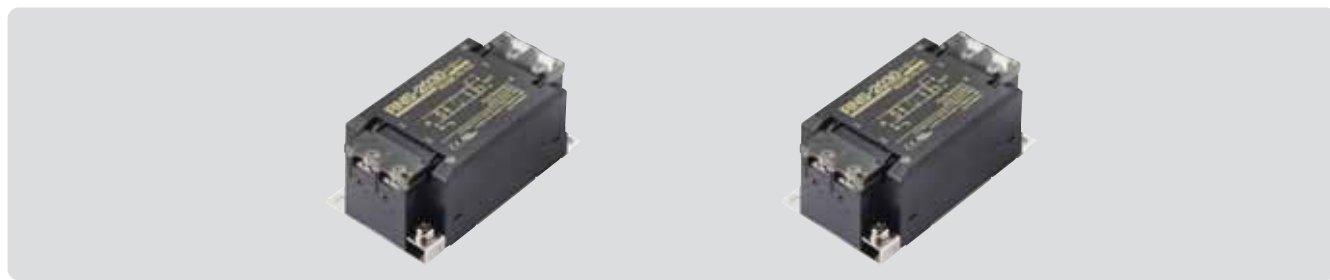


RNS SERIES SPECIFICATIONS 1Ø



MODEL	RATED VOLTAGE (AC/DC)	RATED CURRENT	LEAKAGE CURRENT (60Hz)		OPERATING TEMPERATURE RANGE	APPROVAL
RNS-2006	250V Max	6A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2006-DIN	250V Max	6A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2010	250V Max	10A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2010-DIN	250V Max	10A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2016	250V Max	16A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2016-DIN	250V Max	16A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2020	250V Max	20A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2020-DIN	250V Max	20A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2030	250V Max	30A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE
RNS-2030-DIN	250V Max	30A	1.0mA Max	50°C Max	-25 ~ +100°C	UL, C-UL, CE


RNS SERIES STATIC ATTENUATION CHARACTERISTICS

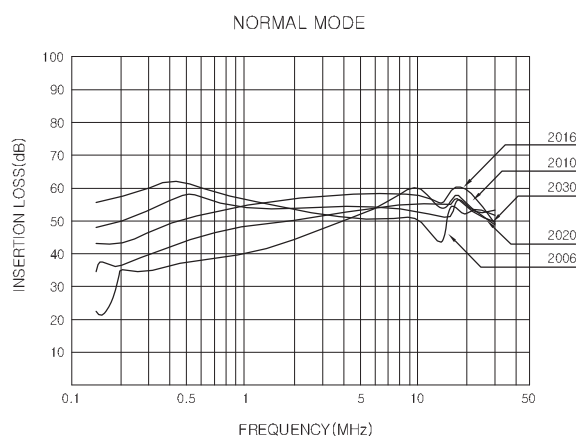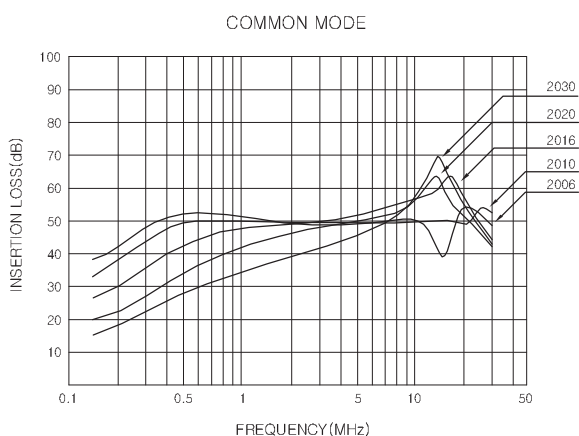

General Information
Switching Mode Power Supply
DC-DC Converter
Noise Filter
Solid State Relay
AC FAN Motor
Power Module
Discrete Semiconductors

Dimension


RNS-2Series

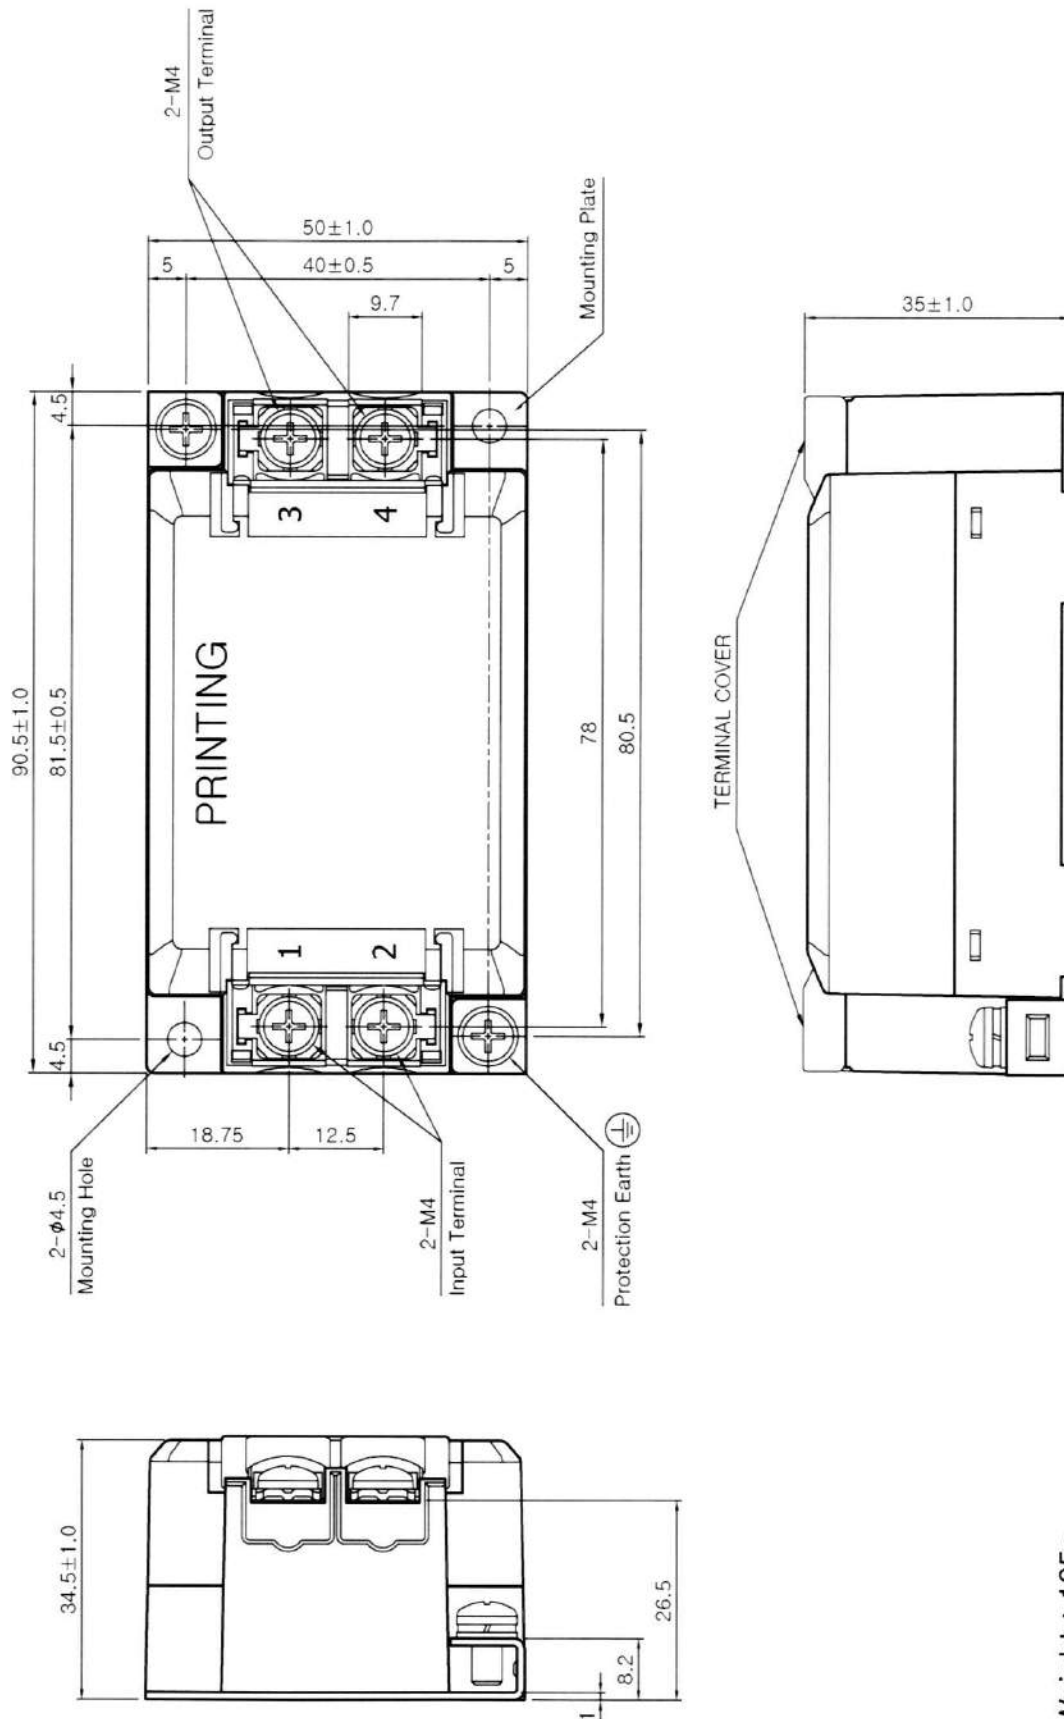

- * Weight : 195g
- * Tolerance : ± 1
- * Dimensions in mm

Dimension

RNS-2S-DIN

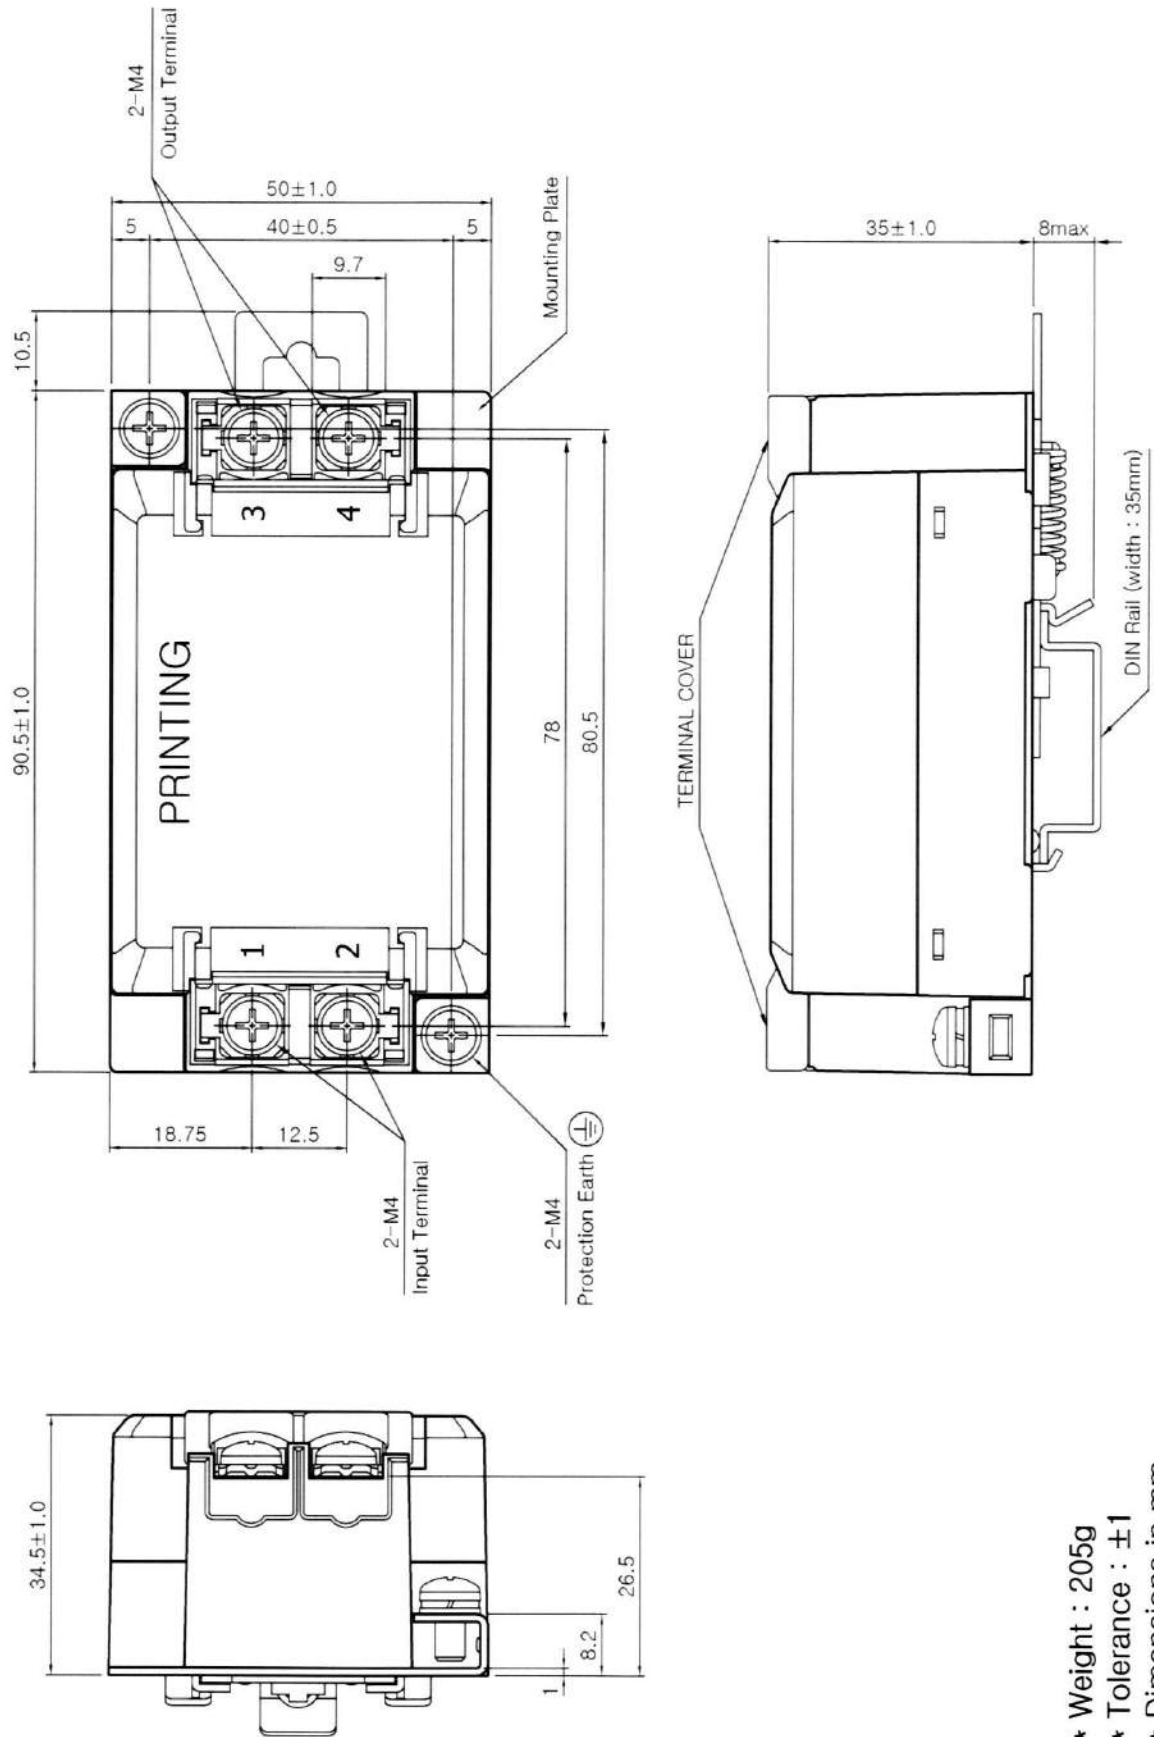

- * Weight : 205g
- * Tolerance : ± 1
- * Dimensions in mm